



A  
一般刀柄

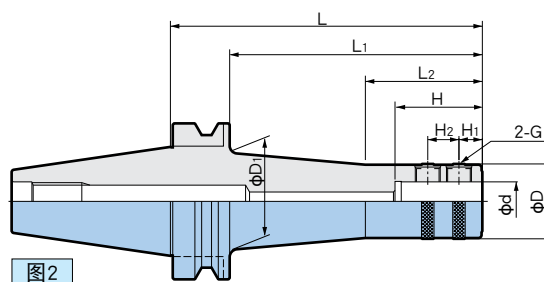

- 型号说明
- BBT30 - T SL 16 - 75
- BBT: BIG-PLUS BT No.
  - T: 中心内冷
  - SL: 侧固式刀柄
  - 16: 夹持直径
  - 75: L尺寸

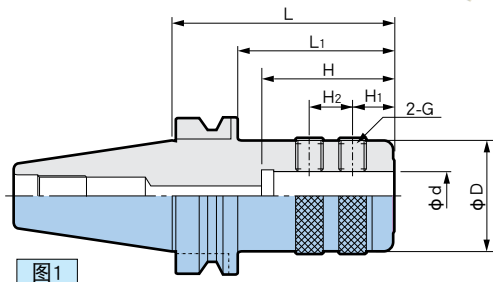

BIG-PLUS (BBT 基础柄) 在 BIG-PLUS 主轴和既有的 BT 主轴上均可使用。

BIG-PLUS BBT基础柄 型号	BT基础柄 型号	图	φd	φD	φD <sub>1</sub>	L	L <sub>1</sub>	L <sub>2</sub>	H	H <sub>1</sub>	H <sub>2</sub>	G	质量 (kg)
BBT30-TSL16- 75	-	1	16	48	-	75	-	-	48	14	14	M10	1.03
-TSL20- 75			20			50			0.98				
-TSL25- 80			25	56		0.97							
-TSL32- 85			32	63		60			15	20	M16	1.38	
BBT40-TSL16- 90	BT40-TSL16- 90	1	16	48	-	90	63	-	48	14	14	M10	1.7
-105	-		105	78		1.9							
-TSL20- 90	-TSL20- 90		20	48		90	63		50	14	14	M10	1.7
-105	-		105	78		1.9							
-TSL25- 90	-TSL25- 90		25	48		90	63		56	15	20	M16	1.6
-105	-105		105	78		1.8							
-TSL32-105	-TSL32-105		32	63		105	78		60	15	20	M16	2.4
-135	-		135	108		3.0							
-TSL40-105	-TSL40-105		40	68		105	-		70	15	25	M16	2.4
BBT50-TSL16- 90	BT50-TSL16- 90		1	16		48	-		90	52	-	48	14
-135	-	135			97			4.8					
-165	-	2	20	48	62.5	165	127	75	50	14	14	M10	5.2
-200	-					200	162						6.1
-TSL20- 90	-TSL20- 90	1	20	48	-	90	52	-	50	14	14	M10	4.2
-135	-135					135	97						4.8
-165	-165					165	127						5.2
-200	-	2	20	48	62.5	200	162	75	50	14	14	M10	6.0
-250	-					64	250	212					90
-TSL25-105	-TSL25-105	1	25	48	-	105	67	-	56	15	20	M16	4.3
-135	-135					135	97						4.7
-165	-165					165	127						5.1
-200	-					2	25						48
-250	-	64	250	212	90			6.7					
-TSL32-105	-TSL32-105	1	32	63	-	105	67	-	60	15	20	M16	4.8
-135	-135					135	97						5.5
-165	-165					165	127						6.2
-200	-					200	162						6.9
-250	-					250	212						8.0
-TSL40-105	-TSL40-105	1	40	68	-	105	67	-	70	15	25	M16	4.8
-135	-135					135	97						5.6
-165	-165					165	127						6.4
-200	-					200	162						7.3
-250	-					250	212						8.6
-TSL50-105	-TSL50-105	1	50	84	-	105	67	-	70	15	25	M16	5.4
-150	-					150	112						7.2

BT 柄型号中“-”记号的无标准品，请选用 BBT 基础柄。

1. 不符合DIN1835B标准。